

DISPENSER TANKS



WHY CHOOSE QUALITY STEEL DISPENSER TANKS?

- 500 - 1,990 WG CAPACITY
- General Specifications
 - Made in the USA
 - Above ground tanks accompanied by a 5 year warranty
 - Standard color is: White
 - Conforms to the latest edition of ASME Rules for Construction of Pressure Vessels, Section VIII, Division 1.
 - Complies with NFPA 58
 - Rated at 250 psig from -20° F to 125° F. All vessels registered with National Board. All standard vessels UL listed (UL 644 - Container Assemblies for LP-Gas).
 - Vessels are either powder coated with TGIC polyester or primed with liquid epoxy and coated with liquid urethane top coat
 - Superior leg design with heavy steel re-enforcing
 - Welded steel valve guard
 - RegO® Valves
 - All vessels are shipped vacuum pre-purged
 - Underground tanks available upon special request
- Family & employee owned
- Financing and leasing available
- Customized delivery programs available
- Largest and most experienced sales support team in the industry

HOW DO I FIND MY SALES REP?

Visit our website, www.propanetank.com to view a list of our reps. Once on our site you'll be able to choose the Commercial options and from there you'll be taken to a list of US states where you can choose your location and view the contact information for your local sales rep. If you don't see your sales rep. please give us a call at 800-345-2495.

Our manufacturing locations are strategically located to help serve your tank needs.

OHIO LOCATION

721 Graham Drive
Fremont, OH 43420
419-334-2664



UTAH LOCATION

5601 Axel Park Rd.
West Jordan, UT 84081
801-280-1133

HOME OFFICE

2914 U.S. 61
Cleveland, MS 38732
800-345-2495

PROUDLY
MADE IN AMERICA

2914 U.S. 61 · Cleveland, MS 38732
800-345-2495 · www.propanetank.com




QUALITY STEEL

Because Quality Steel Means Quality Tanks
★ Thank You for Supporting USA Manufacturers ★

DISPENSER TANKS

Consult our dimension and specification chart below to find the tank that best fits your needs. Visit our website at www.propanetank.com for more information.

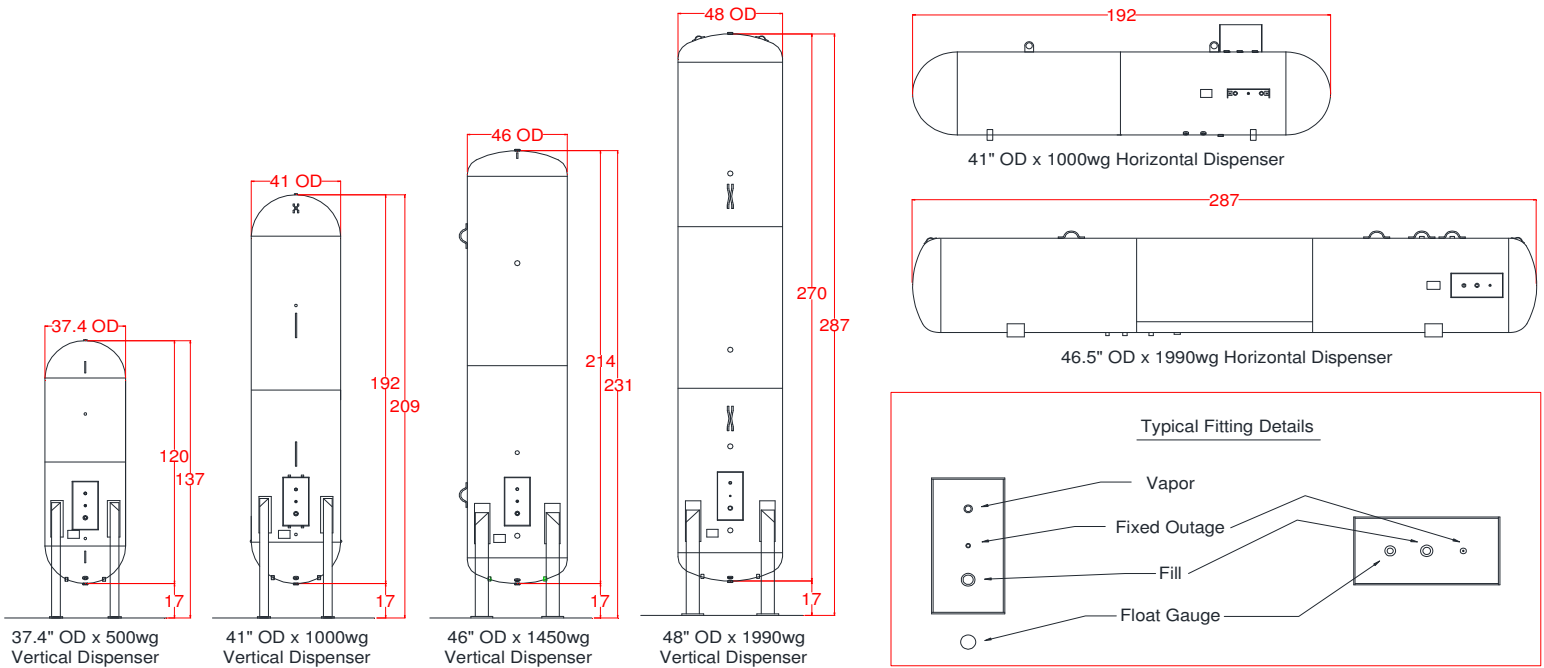

*Other fitting/valve arrangements may be available on special request.

APPROXIMATE DISPENSER DIMENSIONS AND SPECIFICATIONS

Dispenser Type	Nom. Capacity (wg)	Diameter (OD)	Head Type	Vessel Length	Overall Height	Leg Bolt Spacing		Est. Vessel Weight (lbs.)
						Length	Width	
Vertical	500	37.4"	Hemi.	10'	11'-5"	2'-2 1/2"	2'-2 1/2"	950
	1000	41"	Hemi.	16'	17'-5"	2'-5 3/8"	2'-5 3/8"	2,330
	1450	46"	Ellip.	17'-10"	19'-3"	2'-8 1/2"	2'-8 1/2"	3,272
	1990	48"	Ellip.	22'-6"	23'-11"	2'-10"	2'-10"	5,336
Horizontal	1000	41"	Hemi.	10'	4'-10"	10'-1" 11'-9 1/2"	1'-4" 1'-4"	1,800
	1990	46.5"	Ellip.	23'-11"	4'-5"	16'	1'-4"	3,516



HOME OFFICE
2914 U.S.61
Cleveland, MS 38732
800-345-2495

OHIO LOCATION
721 Graham Drive
Fremont, OH 43420
419-334-2664

UTAH LOCATION
5601 Axel Park Rd.
West Jordan, UT 84081
801-280-1133